


**Specifications**

Current Rating: 0.5A mps  
 Voltage Rating: 50V AC  
 Contact Resistance: 40mΩ  
 Insulation Resistance: 100mΩ  
 Withstanding Voltage: AC500V r.m.s(for one minute)  
 Operating Temperature Range: -25°C to +85°C

**Materials and Plating**

Insulator: LCP (Natural Color) UL94V-0  
 Contact: Phosphor Bronze  
 Plating: Gold flash allover  
 Packaging: Tape and reel:1800pcs/reel  
 Mating Height:1.5mm

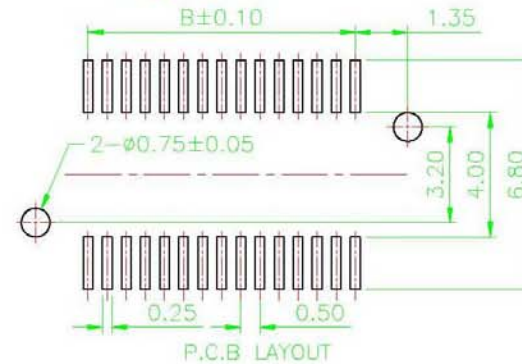

已開模 PIN 數 10,20,30,60

Pins per Row	Dimension Information				Pins per Row	Dimension Information			
	A	B	C	D		A	B	C	D
* 10	5.50	2.00	3.50	4.70	34	11.50	8.00	9.50	10.70
12	6.00	2.50	4.00	5.20	36	12.00	8.50	10.00	11.20
14	6.50	3.00	4.50	5.70	40	13.00	9.50	11.00	12.20
16	7.00	3.50	5.00	6.20	50	15.50	12.00	13.50	14.70
* 20	8.00	4.50	6.00	7.20	* 60	18.00	14.50	16.00	17.20
22	8.50	5.00	6.50	7.70	70	20.50	17.00	18.50	19.70
24	9.00	5.50	7.00	8.20	80	23.00	19.50	21.00	22.20
26	9.50	6.00	7.50	8.70	100	28.00	24.50	26.00	27.20
* 30	10.50	7.00	8.50	9.70					

凱帛企業有限公司 KABO ENTERPRISE CO.,LTD.		
Name		
Pitch:0.5mm Board To Board SMT V/T TYPE (MALE)		
Drawing No.		
BTB-0.5-1059-xx02N		
DR	CHK	APPD
General Tolerances :	Unit :	Scale :
x.xx± x.x±	mm	ROM