




Material:  
 Contact Material: Phosphor Bronze  
 Contact plating: Matte-tin Over 50u" Ni  
 Insulator Material: White Polyester UL-94V-0  
 Standard: LCP+30%G. F


Electrical Characteristics  
 Voltage Rating: 50 V AC(rms)/DC  
 Current Rating: 0.5A AC(rms)/DC  
 Current Resistance: 40mΩ max(initial)  
 Dielectric Withstand Voltage: 200 V AC/rms  
 Insulator Resistance: 100mΩ min  
 Operating Temp: -25°C~+85°C

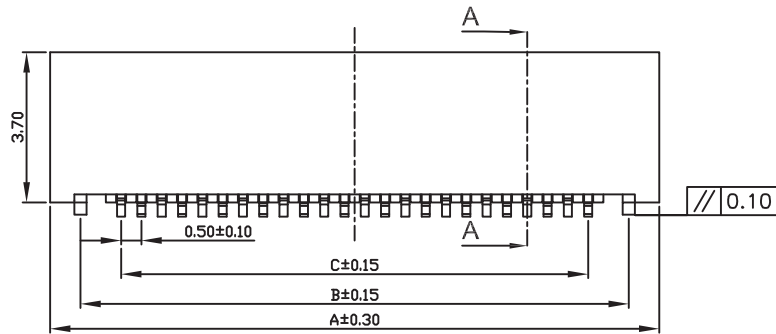

Section : A-A

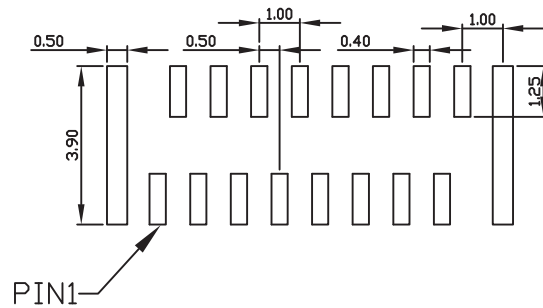

PC BOARD LAYOUT

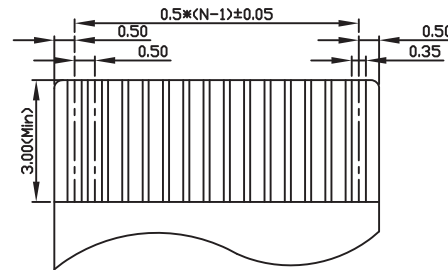

FPC/FFC RECOMMENDED DIM.  
 (THICKNESS: 0.3±0.03)

No. of Contacts (n)	Dimensions			
	A	B	C	D
006	6.0	4.5	2.5	3.6
007	6.5	5.0	3.0	4.1
008	7.0	5.5	3.5	4.6
009	7.5	6.0	4.0	5.1
010	8.0	6.5	4.5	5.6
011	8.5	7.0	5.0	6.1
012	9.0	7.5	5.5	6.6
013	9.5	8.0	6.0	7.1
014	10.0	8.5	6.5	7.6
015	10.5	9.0	7.0	8.1
016	11.0	9.5	7.5	8.6
017	11.5	10.0	8.0	9.1
018	12.0	10.5	8.5	9.6
019	12.5	11.0	9.0	10.1
020	13.0	11.5	9.5	10.6
021	13.5	12.0	10.0	11.1
022	14.0	12.5	10.5	11.6
023	14.5	13.0	11.0	12.1
024	15.0	13.5	11.5	12.6
025	15.5	14.0	12.0	13.1
026	16.0	14.5	12.5	13.6
027	16.5	15.0	13.0	14.1
028	17.0	15.5	13.5	14.6
029	17.5	16.0	14.0	15.1
030	18.0	16.5	14.5	15.6
031	18.5	17.0	15.0	16.1
032	19.0	17.5	15.5	16.6
033	19.5	18.0	16.0	17.1
034	20.0	18.5	16.5	17.6
035	20.5	19.0	17.0	18.1
036	21.0	19.5	17.5	18.6
037	21.5	20.0	18.0	19.1
038	22.0	20.5	18.5	19.6
039	22.5	21.0	19.0	20.1
040	23.0	21.5	19.5	20.6
041	23.5	22.0	20.0	21.1
042	24.0	22.5	20.5	21.6
043	24.5	23.0	21.0	22.1
044	25.0	23.5	21.5	22.6
045	25.5	24.0	22.0	23.1
046	26.0	24.5	22.5	23.6
047	26.5	25.0	23.0	24.1
048	27.0	25.5	23.5	24.6
049	27.5	26.0	24.0	25.1
050	28.0	26.5	24.5	25.6

目前開模PIN數: 6P/8P/10P/11P/12P/14P/15P/16P/18P/20P/22P/24P/26P/30P/32P/45P

凱帛企業有限公司 KABOE ENTERPRISE CO. LTD		
Name		
Pitch: 0.5mm FPC SMT V/T TYPE 正腳位		
Drawing No.		
FPC-0.5-1022-XX03N		
APPD	-HK-	D-R
General Tolerances : -x.xx± x.xx±	Unit: mm	Scale: ROM