


Recommended PCB Layout

### SPECIFICATIONS

Current Rating: 0.75AMP  
 Contact Resistance: 30mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstand Voltage: 500V AC/minute  
 Operation Temperature: -40°C to +105°C

Contact: Brass  
 plating: Au or Sn Over 30u" Ni  
 Insulator: High Temperature Thermoplastic  
 UL94V-0 Rated  
 Standard: PA6T+30%G. F

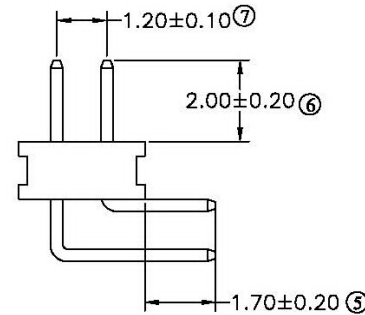

凱帛企業有限公司 KABO ENTERPRISE CO.,LTD.		
Name		
Pitch:0.8mm Pin Header DIP R/A TYPE		
Drawing No.		
PH-0.8-2002-xx91N		
DR	CHK	APPD
General Tolerances :	Unit :	Scale :
x.xx± x.x±	mm	ROM