
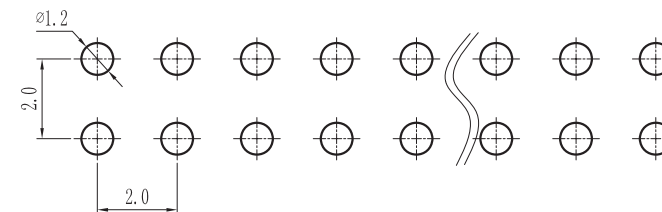
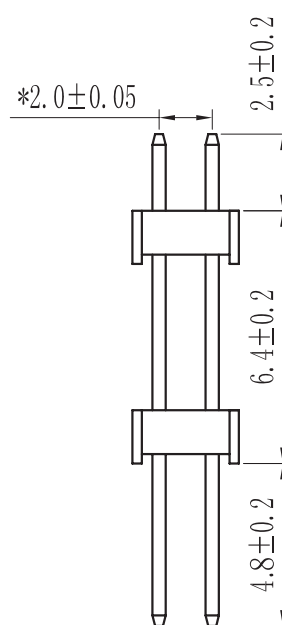
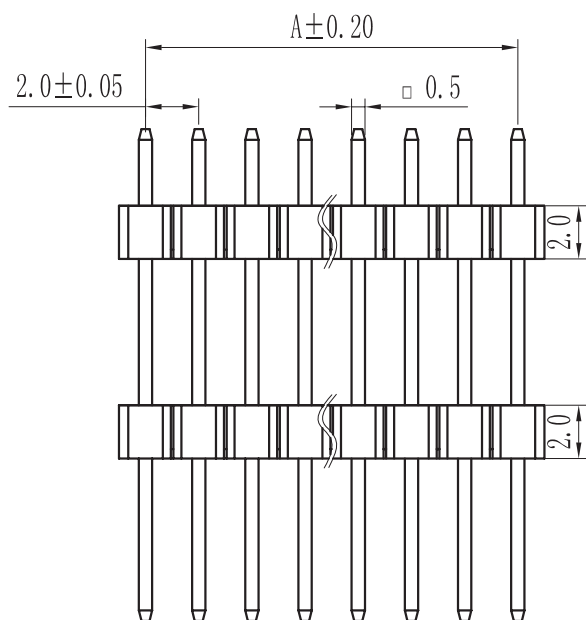


PINS	A	B
2*1P		2.00
2*2P	2.00	4.00
2*3P	4.00	6.00
2*4P	6.00	8.00
2*5P	8.00	10.00
2*6P	10.00	12.00
2*7P	12.00	14.00
2*8P	14.00	16.00
2*9P	16.00	18.00
2*10P	18.00	20.00
2*11P	20.00	22.00
2*12P	22.00	24.00
2*13P	24.00	26.00
2*14P	26.00	28.00
2*15P	28.00	30.00
2*16P	30.00	32.00
2*17P	32.00	34.00
2*18P	34.00	36.00
2*19P	36.00	38.00
2*20P	38.00	40.00
2*21P	40.00	42.00
2*22P	42.00	44.00
2*23P	44.00	46.00
2*24P	46.00	48.00
2*25P	48.00	50.00
2*26P	50.00	52.00
2*27P	52.00	54.00
2*28P	54.00	56.00
2*29P	56.00	58.00
2*30P	58.00	60.00
2*31P	60.00	62.00
2*32P	62.00	64.00
2*33P	64.00	66.00
2*34P	66.00	68.00
2*35P	68.00	70.00
2*36P	70.00	72.00
2*37P	72.00	74.00
2*38P	74.00	76.00
2*39P	76.00	78.00
2*40P	78.00	80.00

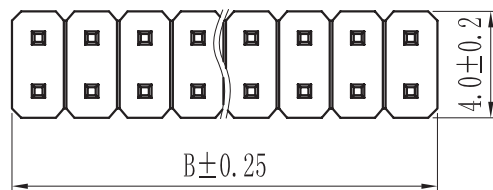

技术规范:

额定电流 : 1.5AMP

适用温度 : -40°C to $+105^{\circ}\text{C}$

接触电阻 : $20\text{m}\Omega$ Max

绝缘电阻 : $1000\text{M}\Omega$ Min

耐电压 : AC 500V

绝缘材料 : Polyester (UL94V-0)
Standard:PA6T

端子材质 : Brass

电镀规范 : Au 0.8u"

PCB LAYOUT

凱帛企業有限公司

KABO ENTERPRISE CO.,LTD.

Name

Pitch:2.0mm Pin Header DIP V/T TYPE

Drawing No.

PH-2.0-2363-xx01N

DR

CHK

APPD

General Tolerances :
xxx ± 0.20
xx ± 0.25

Unit :

mm

Scale :

ROM

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KABO ENTERPRISE LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION..