


■ 技术参数 SPECIFICATIONS

- ◆ 间距: 1.5 Pitch: 1.5
- ◆ 极数: 2~16 Poles: 2~16
- ◆ 适用线规: AWG#26-#32
Applicable Wire: AWG#26-#32
- ◆ 额定电压: 50V DC/AC(rms)
Rated voltage: 50V DC/AC(rms)
- ◆ 额定电流: 1A (AWG #26)
Rated Current: 1A (AWG #26)
- ◆ 耐压值: 500V AC/minute
Withstand voltage: 500V AC/min.
- ◆ 工作温度: -25° C ~ +85° C
Working Temp : -25° C ~ +85° C
- ◆ 绝缘电阻: ≥500 MΩ
Insulation resistance: ≥500 MΩ
- ◆ 接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

■ 材料 MATERIAL

- ◆ 塑胶: 尼龙9T (Nylon9T) , UL94-V0
- ◆ 插针: 黄铜 (Brass)

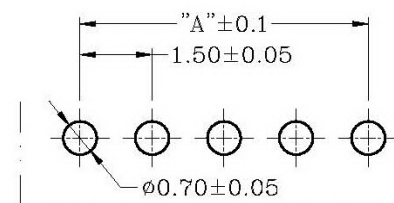

P.C.B LAYOUT

	2A	3A	4A	5A	6A	7A	8A	9A	10A	11A	12A	13A	14A	15A	16A
DIM.A	1.50	3.00	4.50	6.00	7.50	9.00	10.50	12.00	13.50	15.00	16.50	18.00	19.50	21.00	22.50
DIM.B	4.50	6.00	7.50	9.00	10.50	12.00	13.50	15.00	16.50	18.00	19.50	21.00	22.50	24.00	25.50

凱帛企業有限公司 KABO ENTERPRISE LTD.		
Name Pitch1.5mm WAFER DIP R/A TYPE		
Drawing No. WAFER-1.5-2007-XX91N		
DR	CHK	APPD
General Tolerances : x.xx±0.25 x.x±0.30	Unit : mm	Scale : ROM