


Poles	DIM.A	DIM.B
2P	2.0	6.1
3P	4.0	8.1
4P	6.0	10.1
5P	8.0	12.1
6P	10.0	14.1
7P	12.0	16.1
8P	14.0	18.1
9P	16.0	20.1
10P	18.0	22.1
11P	20.0	24.1
12P	22.0	26.1
13P	24.0	28.1
14P	26.0	30.1
15P	28.0	32.1
16P	30.0	34.1

尚未開模PIN數如下
15,16

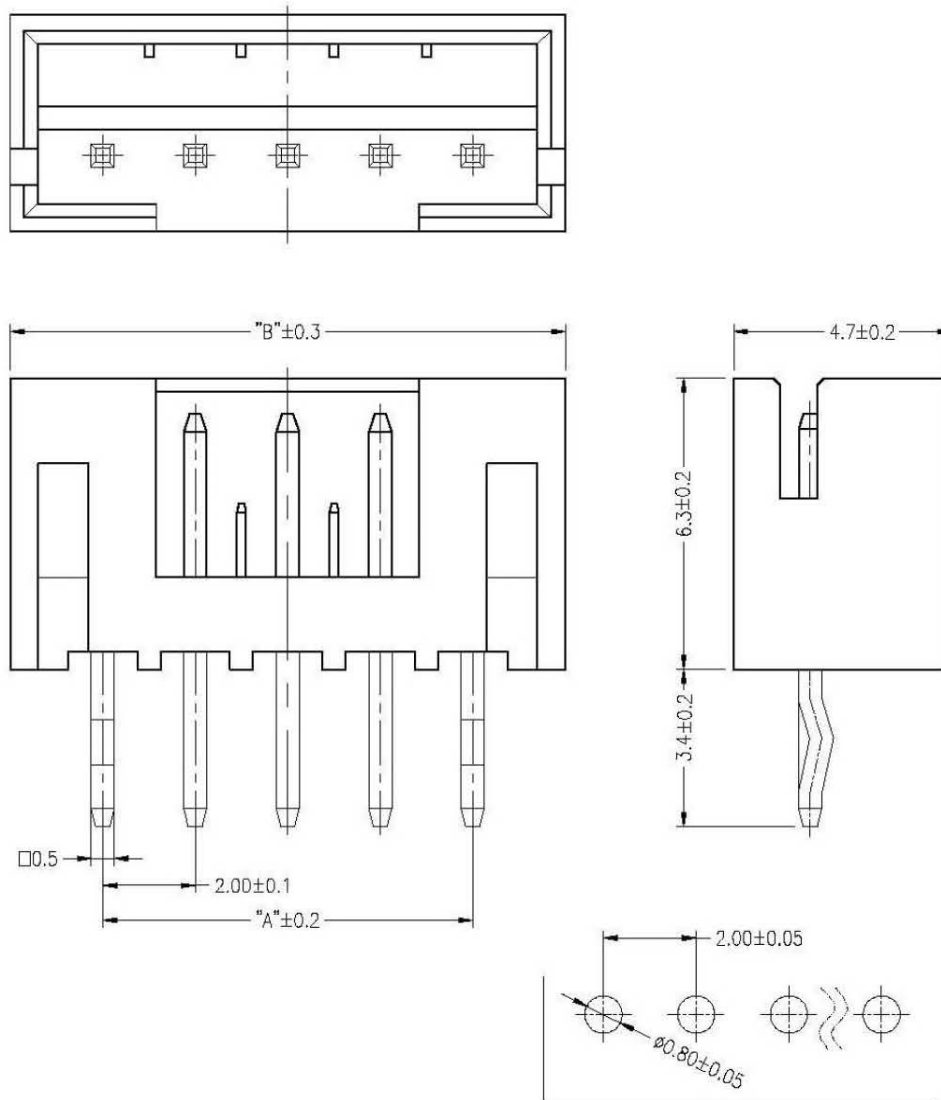

■ 技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#30~#24
Applicable Wire: AWG#30~#24
- ◆ 额定电压: 100V DC,AC(rms)
Rated voltage: 100V DC,AC(rms)
- ◆ 额定电流: 2A (AWG #24)
Rated Current: 2A (AWG #24)
- ◆ 耐压值: 800V AC/minute
Withstand voltage: 800V AC/min.
- ◆ 工作温度: -25°C ~ +85°C
Working Temp : -25°C ~ +85°C
- ◆ 绝缘电阻: ≥1000 MΩ
Insulation resistance: ≥1000 MΩ
- ◆ 接触电阻: ≤10 mΩ
Contact resistance: ≤10 mΩ

■ 材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94-V2
Insulator: Nylon66, UL94-V2
- ◆ 接触针: 黄铜, 镀锡
Contact PIN: Brass, Tin-plating

凱帛企業有限公司 KABO ENTERPRISE CO.,LTD.		
Name Pitch:2.0mm Wafer DIP V/T TYPE		
Drawing No WF-2.0-2028-xx01N		
APPD	CHK	RD
General Tolerances : x.xx± x.x±	Unit: mm	Scale: ROM