
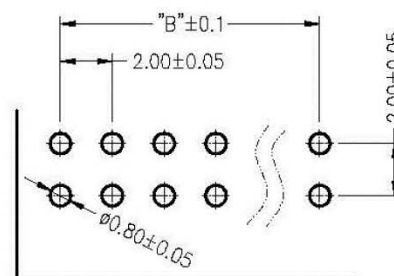
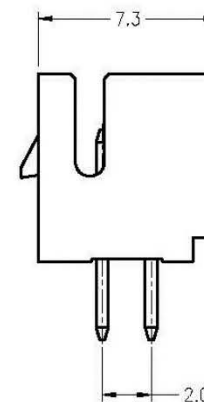
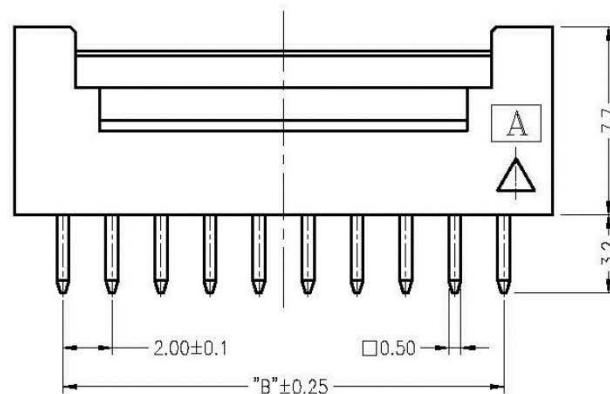


Poles	DIM.A	DIM.B
2*2	6.00	2.00
2*3	8.00	4.00
2*4	10.00	6.00
2*5	12.00	8.00
2*6	14.00	10.00
2*7	16.00	12.00
2*8	18.00	14.00
2*9	20.00	16.00
2*10	22.00	18.00
2*11	24.00	20.00
2*12	26.00	22.00
2*13	28.00	24.00
2*14	30.00	26.00
2*15	32.00	28.00
2*16	34.00	30.00
2*17	36.00	32.00
2*18	38.00	34.00
2*19	40.00	36.00
2*20	42.00	38.00
2*30	62.00	58.00

以下PIN數未開模

2*2, 2*3, 2*30

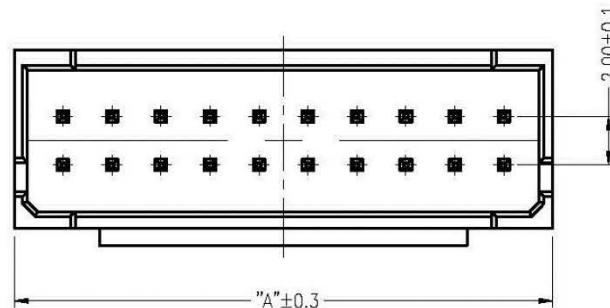

P.C.B LAYOUT

■ 技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#28~#22
Applicable Wire: AWG#28~#22
- ◆ 额定电压: 250V DC,AC
Rated voltage: 250V DC,AC
- ◆ 额定电流: 3A
Rated Current: 3A
- ◆ 耐压值: 1000V AC/minute
Withstand voltage: 1000V AC/min.
- ◆ 工作温度: -25°C ~ +85°C
Working Temp : -25°C ~ +85°C
- ◆ 绝缘电阻: ≥1000 MΩ
Insulation resistance: ≥1000 MΩ
- ◆ 接触电阻: ≤30mΩ
Contact resistance: ≤30mΩ

■ 材料 MATERIAL

- ◆ 绝缘体: 尼龙46, UL94-V0
Insulator: Nylon46, UL94-V0
- ◆ 接触针: 黄铜
Contact PIN: Brass

凱昂企業有限公司 KABOE ENTERPRISE CO.,LTD.		
Name		
Pitch:2.0mm Wafer DIP V/T TYPE		
Drawing No.		
WF-2.0-2043-xx01N		
D-R	-HK-	APPD
General Tolerances :	Unit :	Scale :
-x.xx± x.x±	mm	ROM