


P. C. B LAYOUT

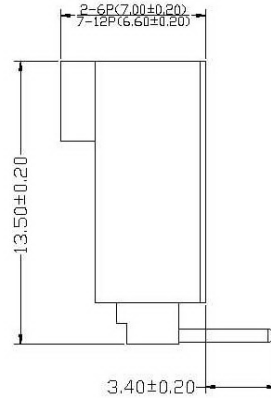

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 3A AC/DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min.
- Temperature range: -25° C - +85° C
- Contact resistance: 20mΩ Max.

■ WAFER

- Part No.: KY-2543WR-XX
- Poles: 2-18
- Material: Nylon66 UL 94V-0
Contact: Brass, Gold flash
- Q' TY: 1000 Pcs/Bag

POLES	Dimension(mm)	
	A	B
2	2.54	7.62
3	5.08	10.16
4	7.62	12.70
5	10.16	15.24
6	12.70	17.78
7	15.24	20.32
8	17.78	22.86
9	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02

凱帛企業有限公司 KABO ENTERPRISE CO.,LTD.		
Name Pitch:2.54mm Wafer DIP R/A TYPE		
Drawing No. WF-2.54-2019-xx91N		
DR	CHK	APPD
General Tolerances : x.xx± x.x±	Unit : mm	Scale : ROM