
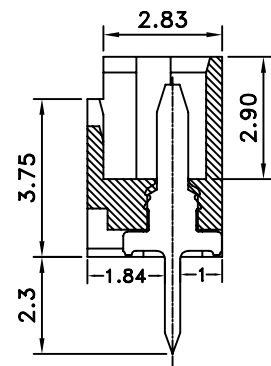


Specifications:

Electrical
 Rated Voltage: 100V AC,DC
 Rated Current: 1A
 Withstand Voltage: 250V AC/minute
 Contact Resistance: 20mΩ (MAX.)
 Insulation Resistance: 100MΩ (MIN.)
 Temperature Range: -25°C~+85°C



Material and Finish:
 Circuits: 02~20
 Material: NYLON 46 UL94V-0

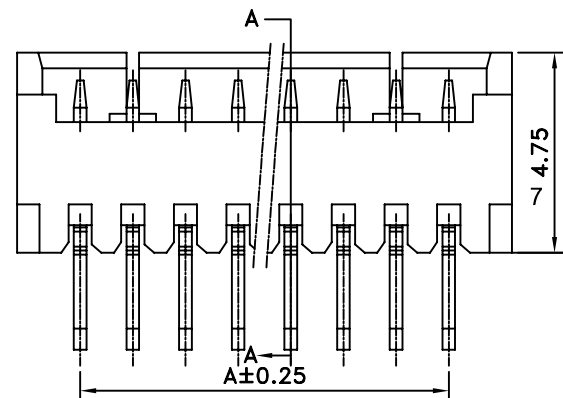

Section: A-A

Dimensional & Ordering Information:

Cir- cuits	Part No	Dimension mm			Q'ty/ bag
		A	B	C	
02	Wafer-1.25-2006-0201N	1.25	4.25	3.05	1,000
03	Wafer-1.25-2006-0301N	2.50	5.50	4.30	1,000
04	Wafer-1.25-2006-0401N	3.75	6.75	5.55	1,000
05	Wafer-1.25-2006-0501N	5.00	8.00	6.80	1,000
06	Wafer-1.25-2006-0601N	6.25	9.25	8.05	500
07	Wafer-1.25-2006-0701N	7.50	10.50	9.30	500
08	Wafer-1.25-2006-0801N	8.75	11.75	10.55	500
09	Wafer-1.25-2006-0901N	10.00	13.00	11.80	500
10	Wafer-1.25-2006-1001N	11.25	14.25	13.05	500
11	Wafer-1.25-2006-1101N	12.50	15.50	14.30	300
12	Wafer-1.25-2006-1201N	13.75	16.75	15.55	300
13	Wafer-1.25-2006-1301N	15.00	18.00	16.80	300
14	Wafer-1.25-2006-1401N	16.25	19.25	18.05	200
15	Wafer-1.25-2006-1501N	17.50	20.50	19.30	200
16	Wafer-1.25-2006-1601N	18.75	21.75	20.55	200
17	Wafer-1.25-2006-1701N	20.00	23.00	21.80	200
18	Wafer-1.25-2006-1801N	21.25	24.25	23.05	200
19	Wafer-1.25-2006-1901N	22.50	25.50	24.30	200
20	Wafer-1.25-2006-2001N	23.75	26.75	25.55	200

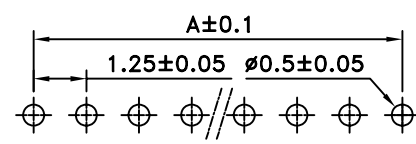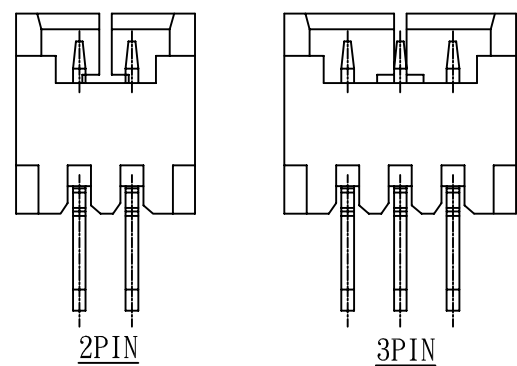

P.C.B. LAYOUT

凱帛企業有限公司
 KABO ENTERPRISE CO., LTD.

DESCRIPTION(內容):
 Pitch1.25mm WAFER DIP V/T TYPE

PART NO:
 (料號) Wafer-1.25-2006-xx01N

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
 (公差)

.X ±0.25
 .XX ±0.13
 .XXX±0.08

SCALE(比例):
 1:XX



REV:
 A

UNIT:
 mm

SIZE:
 A4

SHEET:
 1/1

REV

1

2

3

4

DESCRIPTION

DATE