


PCB LAYOUT

NOTES

1. MATERIAL & FLASH/PLATED
 - 1.1 HOUSING: HIGH TEMP. THERMOPLASTIC+GLASS FIBRE
(UL 94V-0); COLOR: BLACK
 - 1.2 PROBE: COPPER ALLOY
.TOP PROBE:15u"GOLD
.BOTTOM PROBE:15u"GOLD
 - 1.3 SPRING: PIANO WIRE
.PLATING: 15u"GOLD
 - 1.4 TERMINAL: COPPER ALLOY
.PLATING: GOLD FLASH ON CONTACT AREA
100u" TIN ON SOLDER TAIL
2. PRODUCT SPECIFICATION
 - 2.1 DISPLACEMENT: 1.0mm MIN.
 - 2.2 CONTACT RESISTANCE: 50MILLIOHMS MAX.
 - 2.3 NDRMAL FORCE: PRE-LOAD=30gf MIN.
.DISPLACEMENT=130±30g
 - 2.4 DURABILITY: 10,000CYCLE
NOTES: REDUCTION OF ORIGINAL FORCE 20% LOSS.

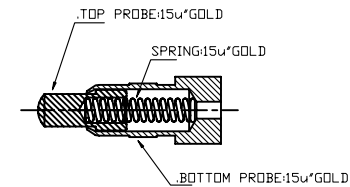

凱帛企業有限公司
KABO ENTERPRISE CO., LTD.

DESCRIPTION(內容)
Pitch6.0mm BATTERY CONNECTOR
SMT R/A TYPE 03PIN 15u"

PART NO:
(料號) Battery-6.0-1004-0393N

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X °
.XXX .XX °

SCALE(比例):
1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

1/1

4

DESCRIPTION

DATE

2007.2.15