

凱帛企業有限公司
KABO ENTERPRISE CO., LTD.

DESCRIPTION(內容):
MINI HDMI RECEPTACLE SMT C TYPE 19PIN

PART NO:
(料 號) HDMI-1003-1991N

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X ±0.30
.XX ±0.20

SCALE(比例):
1:XX


REV: A1

UNIT: mm

SIZE: A4

SHEET: 1/1


REV	DESCRIPTION	DATE
1		2007.10.24
2		
3		
4		

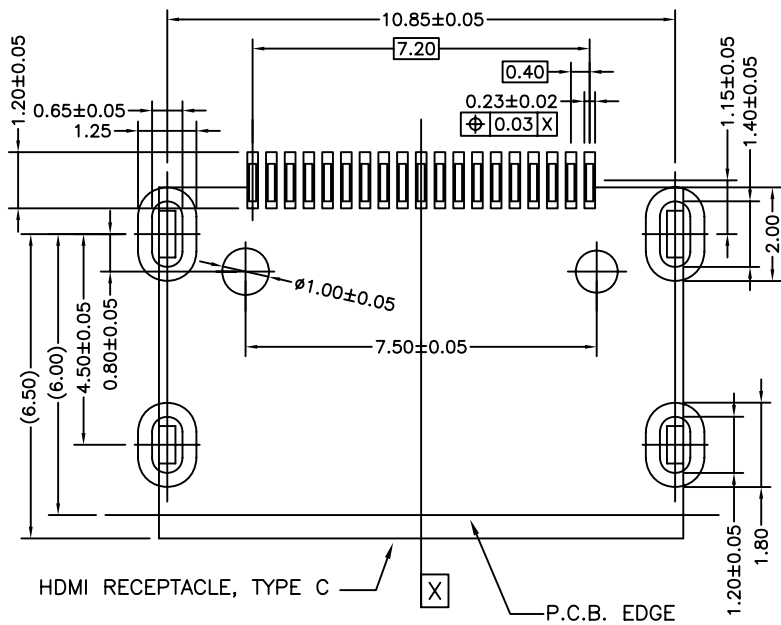

RECOMMENDED PCB LAYOUT

SPECIFICATIONS

- OPERATING CURRENT: 0.5A MAX.
- OPERATION TEMPERATURE: -25°C TO +85°C
- DIELECTRIC WITHSTANDING VOLTAGE:
 - 500Volts AC BETWEEN ADIACENT TERMINAL(UNMATE)
 - 300Volts AC BETWEEN ADIACENT TERMINAL(MATE)
- INSULATION RESISTANCE:
 - 100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)
- 30u" GOLD PLATED IN CONTACT AREA
AND GOLD FLASH PLATED IN SOLDER AREA
OVER 50u" NICKEL UNDERPLATING

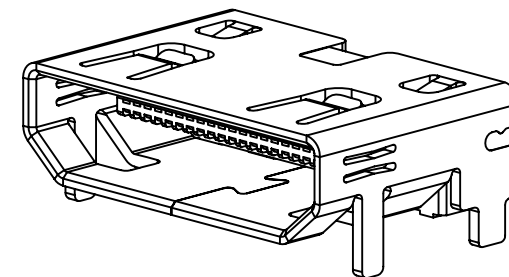

凱帛企業有限公司
KABO ENTERPRISE CO., LTD.

DESCRIPTION(內容): MINI HDMI RECEPTACLE SMT C TYPE 19PIN	DRAWN(製圖):	GENERAL TOLERANCE: (公差)	REV: A/1	REV	DESCRIPTION	DATE
PART NO: (料 號) HDMI-1003-1991N	CHECKED(確認):	.XX±0.30 .X ±0.20	UNIT: mm	1		2007.10.24
DWG NO(圖號):	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2		
			SHEET: 1/1	3		
				4		