



Specifications:

Electrical

- Rated Voltage: 50V AC, DC
- Rated Current: 0.5A
- Withstand Voltage: 500V AC/minute
- Contact Resistance: 20mΩ (MAX.)
- Insulation Resistance: 100MΩ (MIN.)
- Temperature Range: -25°~+85°C


Material and Finish:

- Circuits: 02-15
- Color: GRAY
- Material: POLYAMIDE UL94V-0

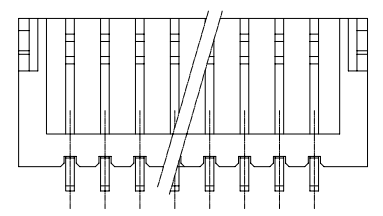

Dimensional & Ordering Information:

Cir- cuits	Part No	Dimension mm			REEL/ PCS
		A	B	C	
02	Wafer-1.0-1005-0293N	1.0	4.6	2.4	2,000
03	Wafer-1.0-1005-0393N	2.0	5.6	3.4	2,000
04	Wafer-1.0-1005-0493N	3.0	6.6	4.4	2,000
05	Wafer-1.0-1005-0593N	4.0	7.6	5.4	2,000
06	Wafer-1.0-1005-0693N	5.0	8.6	6.4	2,000
07	Wafer-1.0-1005-0793N	6.0	9.6	7.4	2,000
08	Wafer-1.0-1005-0893N	7.0	10.6	8.4	2,000
09	Wafer-1.0-1005-0993N	8.0	11.6	9.4	2,000
10	Wafer-1.0-1005-1093N	9.0	12.6	10.4	2,000
11	Wafer-1.0-1005-1193N	10.0	13.6	11.4	2,000
12	Wafer-1.0-1005-1293N	11.0	14.6	12.4	2,000
13	Wafer-1.0-1005-1393N	12.0	15.6	13.4	2,000
14	Wafer-1.0-1005-1493N	13.0	16.6	14.4	2,000
15	Wafer-1.0-1005-1593N	14.0	17.6	15.4	2,000

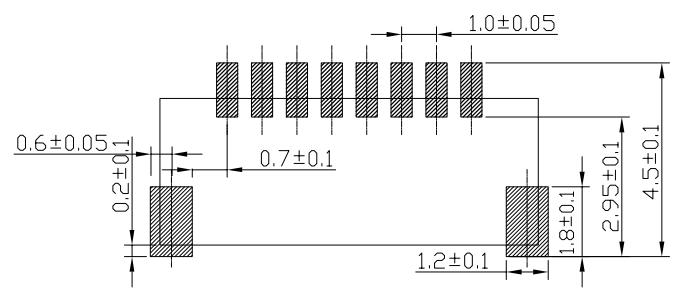

RECOMMENDED P.C.BOARD HOLE DIMM.

凱帛企業有限公司
KABO ENTERPRISE CO., LTD.

DESCRIPTION(內容)	DRAWN(製圖)	GENERAL TOLERANCE: (公差)	REV: A	REV	DESCRIPTION	DATE
			Pitch1.0mm WIRE TO BOARD SMT R/A TYPE H:1.95			
PART NO: (料號) Wafer-1.0-1005-xx93N	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2		
DWG NO(圖號):			SHEET: 1/1	3		
				4		