


Recommended P.C.B Layout(Top Side)

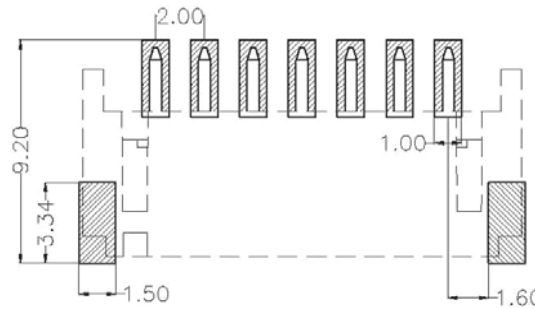

NOTES:

Current Rating:1.0AMP

Contact Resistance:20mΩ max

Withstand Voltage:800V AC/DC



Insulation Resistance:1000MΩ min

Operation Temperature:-40℃ to +85℃

Contact Material:Phosphor Bronze

Contact plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

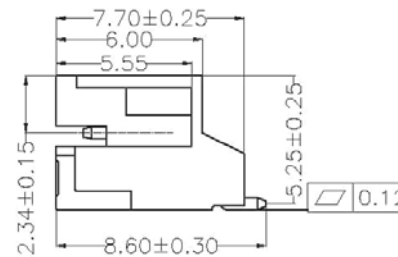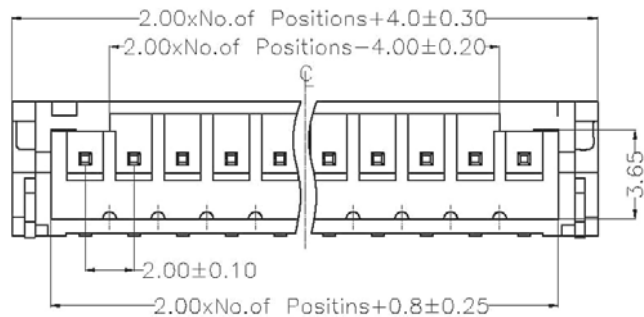

凱帛企業有限公司 KABO ENTERPRISE LTD.		
Name Pitch2.0mm WAFER SMT R/A TYPE		
Drawing No. WF-2.0-1003-xx93N		
DR	CHK	APPD
General Tolerances : x.xx±0.25 x.x±0.30	Unit : mm	Scale : ROM