

## SPECIFICATIONS

### Electrical

Current Rating: 3A AC DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C




Contact Resistance: 20mΩ/ Max.

Insulation Resistance: 1000MΩ/ Min.

### Material

Terminal Material: Brass/ Tin-plated/ Gold-plated

Material: Nylon 66, UL 94V-0

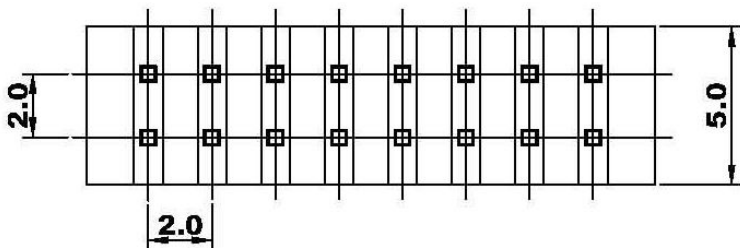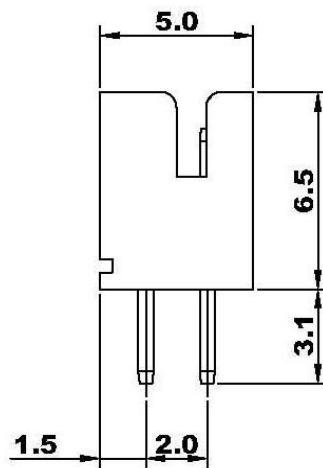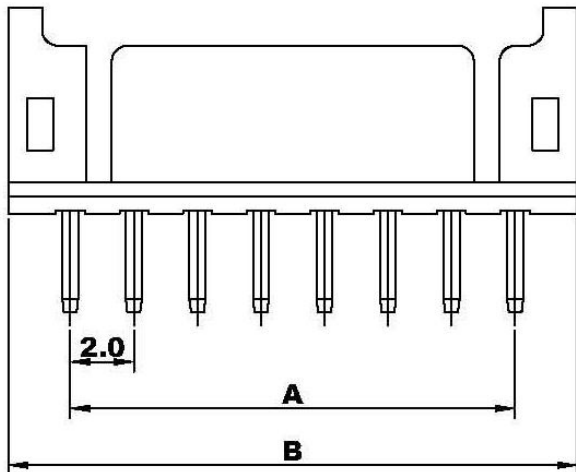

Poles	Dimension mm(in.)	
	A	B
2*3	4.0(0.157)	7.9(0.311)
2*4	6.0(0.236)	9.9(0.390)
2*5	8.0(0.315)	11.9(0.469)
2*6	10.0(0.394)	13.9(0.547)
2*7	12.0(0.472)	15.9(0.626)
2*8	14.0(0.551)	17.9(0.705)
2*9	16.0(0.630)	19.9(0.783)
2*10	18.0(0.709)	21.9(0.862)
2*11	20.0(0.787)	23.9(0.941)
2*12	22.0(0.886)	25.9(1.020)
2*13	24.0(0.945)	27.9(1.098)
2*14	26.0(1.024)	29.9(1.177)
2*15	28.0(1.102)	31.9(1.256)
2*16	30.0(1.181)	33.9(1.335)

凱帛企業有限公司  
KABO ENTERPRISE LTD.

Name  
Pitch2.0mm Wafer DIP V/T Type Dual Row

Drawing No.  
Wafer-2.0-2003-xx01

DR CHK APPD

General Tolerances :  
x.xx±0.1  
x.x±0.5

Unit :  
mm

Scale :  
ROM