
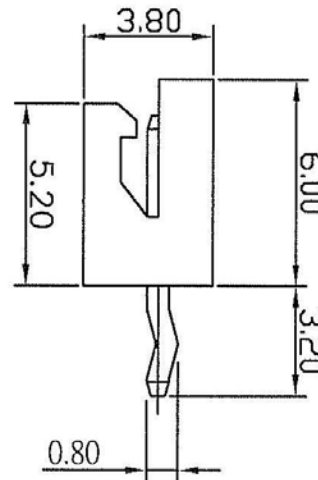


RECOMMENDED P.C. BOARD HOLE DIMM.

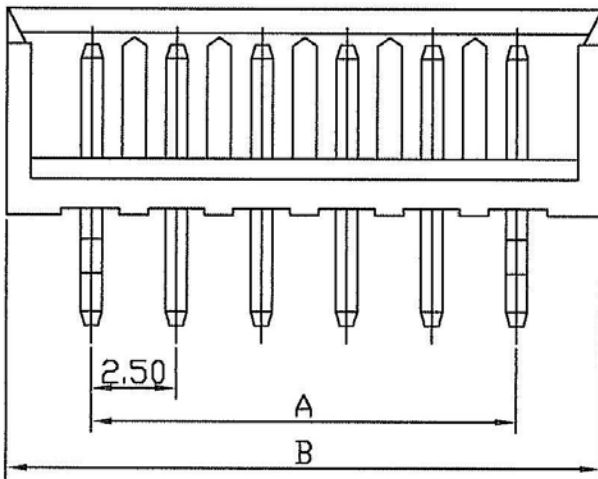

SPECIFICATIONS

Electrical

Current Rating : 2.5A AC, DC

Voltage Rating : 250V AC/max.

Operation Temp : -25°C ~ +85°C

Insulation Resistance : 1000M Ω /min.

Dielectric Withstanding Voltage : 800V AC/min.

Contact Resistance : 10m Ω /max.

Material

Terminal Material : Brass, Copper-Undercoated,
Tin-Lead plated

Material : Nylon 66, UL94V-0

Poles	Dimension mm (in.)	
	A	B
2	2.50(0.098)	7.50(0.295)
3	5.00(0.197)	10.00(0.394)
4	7.50(0.295)	12.50(0.492)
5	10.00(0.394)	15.00(0.591)
6	12.50(0.492)	17.50(0.689)
7	15.00(0.591)	20.00(0.787)
8	17.50(0.689)	22.50(0.886)
9	20.00(0.787)	25.00(0.984)
10	22.50(0.886)	27.50(1.082)
11	25.00(0.984)	30.00(1.181)
12	27.50(1.082)	32.50(1.280)
13	30.00(1.181)	35.00(1.378)
14	32.50(1.280)	37.50(1.476)
15	35.00(1.378)	40.00(1.575)

凱帛企業有限公司
KABO ENTERPRISE LTD.

Name

Pitch2.5mm Wafer DIP V/T Type

Drawing No.

Wafer-2.5-2003-xx01N

DR

CHK

APPD

General Tolerances :

x.xx \pm 0.1
x.x \pm 0.5

Unit :

mm

Scale :

ROM