




SPECIFICATIONS

Current Rating:3 Amps
 Insulator Resistance:5000 Megohms min.
 Dielectric Withstanding:AC 1000 V
 Contact Material:Copper Alloy
 Insulator Material:Polyester, UL 94V-0
 Standard:Nylon-6T
 Finish:Gold Plated
 Standard:Gold Flash all over

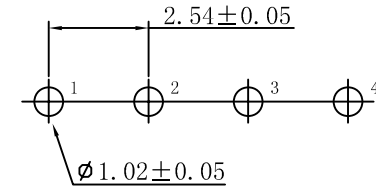

RECOMMENDED P. C. BOARD HOLE LAYOUT

P. C. B LAYOUT TOLERANCE: ±0.05mm

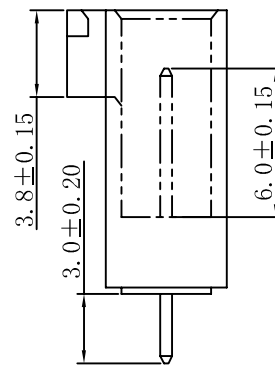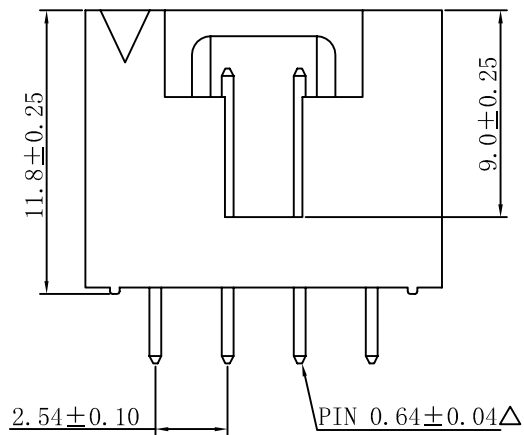

規格	尺寸	A	B	C
2P		7.62	5.62	2.54
3P		10.16	8.16	5.08
4P		12.70	10.70	7.62
5P		15.24	13.24	10.16

凱帛企業有限公司
 KABO ENTERPRISE CO., LTD.

DESCRIPTION(內容):
 WIRE XXP, MA, 2.54mm 無定位柱

PART NO:
 (料號) Wafer-2.54-2004-xx01N

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
 (公差)

.X .XXXX
 .XX .X°
 .XXX .XX°

SCALE(比例):
 1:XX



REV:
 A/2
 UNIT:
 mm
 SIZE:
 A4
 SHEET:
 1/1

REV
 1
 2
 3
 4

DESCRIPTION
 △此符號表示重點管控尺寸

DATE

2006.05.19